


**52 HRC**  
**62 HRC**



**General Use**

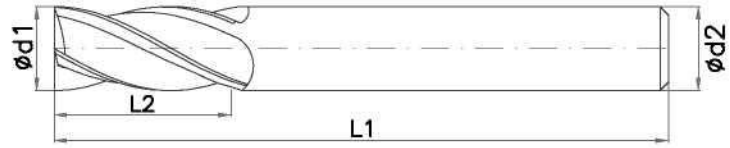

**Standard Size**

- Chattering-free Machining
- Helix angle 35° - 38°
- Shaft Tolerance h6
- Micrograin ISO:K10/20
- Durable, high speed resistant

General Engineering · Diesinking · Automotive · Defense Industry



ø d1	L2	L1	ø d2	Order Code 52 HRC	Order Code 62 HRC
3	9	50	3	SFCT3124-030000	SFCT3624-030000
4	14	50	4	SFCT3124-040000	SFCT3624-040000
5	15	50	5	SFCT3124-050000	SFCT3624-050000
6	15	50	6	SFCT3124-060000	SFCT3624-060000
7	19	60	7	SFCT3124-070000	SFCT3624-070000
8	20	60	8	SFCT3124-080000	SFCT3624-080000
9	21	72	9	SFCT3124-090000	SFCT3624-090000
10	21	72	10	SFCT3124-100000	SFCT3624-100000
12	25	75	12	SFCT3124-120000	SFCT3624-120000
14	32	80	14	SFCT3124-140000	SFCT3624-140000
16	32	92	16	SFCT3124-160000	SFCT3624-160000
18	32	100	18	SFCT3124-180000	SFCT3624-180000
20	35	100	20	SFCT3124-200000	SFCT3624-200000