


52 HRC



## General Use

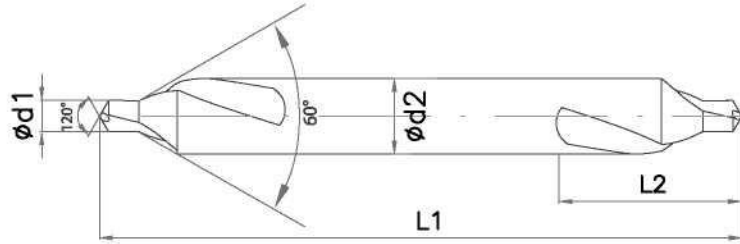

## SPOT DRIL BIT / 60°

Shaft Tolerance h6

Micrograin ISO:K10/20

General Engineering • Diesinking • Automotive • Defense Industry



$\phi d1$	L2	L1	$\phi d2$	Z	Order Code for Uncoated	Order Code for Coated
1	2	35	3	2	SMLO0122-010000	SMLO1122-010000
1,25	2	35	3	2	SMLO0122-012500	SMLO1122-012500
1,6	2,4	35	4	2	SMLO0122-016000	SMLO1122-016000
2	2,9	40	5	2	SMLO0122-020000	SMLO1122-020000
2,5	3,6	45	6	2	SMLO0122-025000	SMLO1122-025000
3,15	4,4	50	8	2	SMLO0122-031500	SMLO1122-031500
4	5,6	56	10	2	SMLO0122-040000	SMLO1122-040000
5	6,9	63	12	2	SMLO0122-050000	SMLO1122-050000
6,3	8,6	71	16	2	SMLO0122-063000	SMLO1122-063000